


Installation Guide

Napa Vessel Faucet – Unlacquered Brass

TOOLS & MATERIALS


Tape measure, Phillips screwdriver, adjustable wrench, safety glasses and 100% neutral-cure silicone sealant.

1 Prepare the faucet

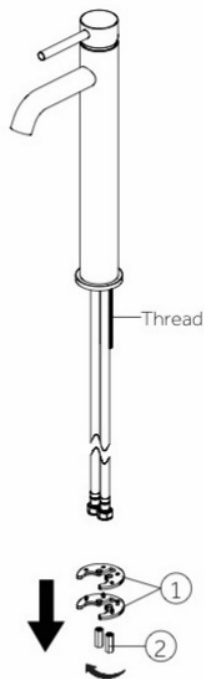

Shut off both water supplies. Remove the mounting washers **(1)** and nuts **(2)** from the threaded shank. Keep them for reassembly.


2 Position & secure

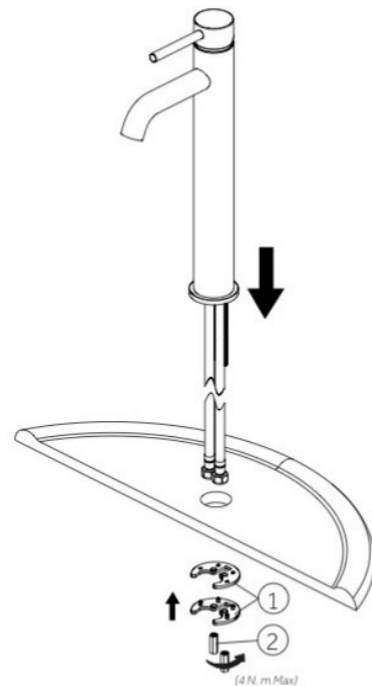

Feed the hoses and shank through the mounting hole. Refit washers **(1)** and nuts **(2)** underneath. Align the spout and secure.

Mounting nut: max. 4 N·m. Do not overtighten.

3 Connect the supply hoses



Connect each supply-hose nut **(1)** to its matching hot or cold shut-off valve outlet **(2)**. Tighten with a wrench without overtightening.

FLUSH & CHECK

Remove the aerator, open the supplies slowly and flush. Refit the aerator. Check every joint for leaks with the faucet running and off.

Finish care: Use mild soap and a soft cloth. Avoid abrasive pads and harsh cleaners.