

Outdoor Shower Installation Guide

01 / Preparation & installation notes

Tools you will need



Adjustable wrench



Hex key



Phillips screwdriver



PTFE thread seal tape

Before you install

- 01** Inspect the package contents upon receipt. If any parts are missing or damaged, contact us immediately.
- 02** Ensure that the embedded water outlet pipe connections conform to the same size standard as the product.
- 03** Do not disassemble the main body. It has been assembled, commissioned, and calibrated at the factory.
- 04** When facing the faucet, connect the hot water inlet to the LEFT and the cold water inlet to the RIGHT.
- 05** Before installation, thoroughly flush the water pipes to remove debris, sludge, and sediment. This prevents blockages within the product.
- 06** After installation, check all connections for leaks and ensure every joint is securely sealed.
- 07** Avoid excessive bending of the shower hose. Maintain its natural shape to prevent permanent deformation.


Operating limits

Minimum inlet water pressure	≥ 0.1 MPa
Maximum inlet water pressure	≤ 1.0 MPa
Maximum operating water temperature	90°C (194°F) — do not exceed
Maximum tightening torque at nut joints	10 N·m — do not exceed

Outdoor Shower Installation Guide

02 / Installation steps


01

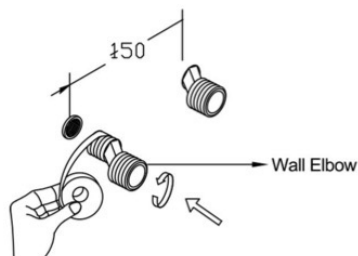

Connect the wall elbows

Wrap the wall elbow threads with PTFE thread seal tape. Screw the elbows into the pre-installed water outlet connections in the wall. The distance between the two outlet connections must be 150 mm.


02

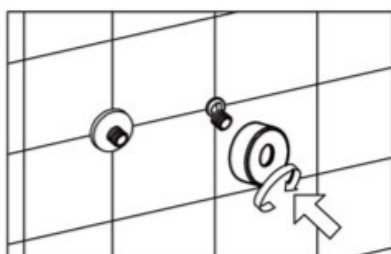

Fit the decorative covers

Slide the decorative covers onto the wall elbows and turn them until they sit flush against the wall surface.


03

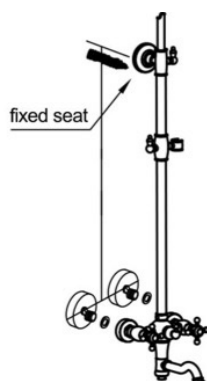

Secure the mounting seat

Mark the mounting seat hole positions according to the product dimensions. Secure the mounting seat to the wall.

04

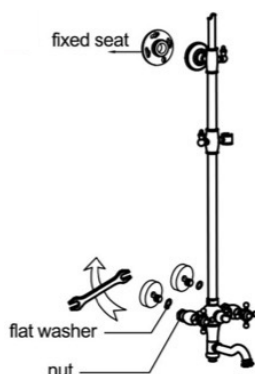

Connect and assemble


Place the flat washer into the connecting nut. Connect the nut to the elbow and tighten securely with a wrench. Insert the shower arm bracket into the mounting seat and tighten the bracket screws with the hex key. Finally, connect the hand shower and showerhead to their respective outlets.

Outdoor Shower Installation Guide

03 / Operating instructions


Hot water control

Turn the left hot water knob clockwise to open. A greater rotation angle increases water flow. Turn it back to reduce flow and close it completely.

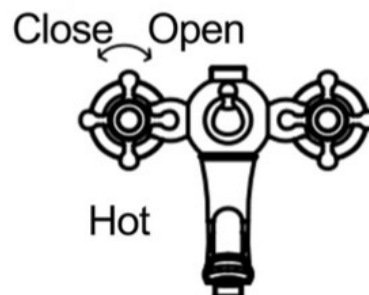

Cold water control

Turn the right cold water knob counterclockwise to open. A greater rotation angle increases water flow. Turn it back to reduce flow and close it completely.

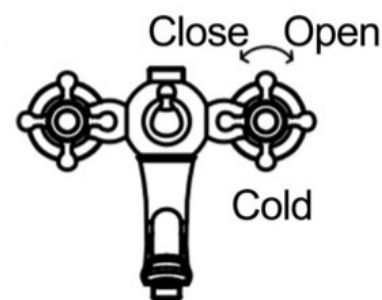

Select the water outlet

Up: overhead shower.

Left (counterclockwise): handheld shower.

Right (clockwise): tub spout; the handheld shower will not output water.



Diverter position after use

The diverter does not automatically reset when the water is shut off. At the next use, water flows from the last selected outlet. After each shower, return the diverter upward to the overhead shower position.